


Detail B

POWDERCOATED ALUMINIUM BRACKET

FIXED TO POST USING 2 X 12-14gX25mm GALVANISED PAINTED SELF-DRILLING SCREWS IN BRACKET HOLES AND ONE SCREW THROUGH UNDERSIDE OF THE TOP BRACKETS

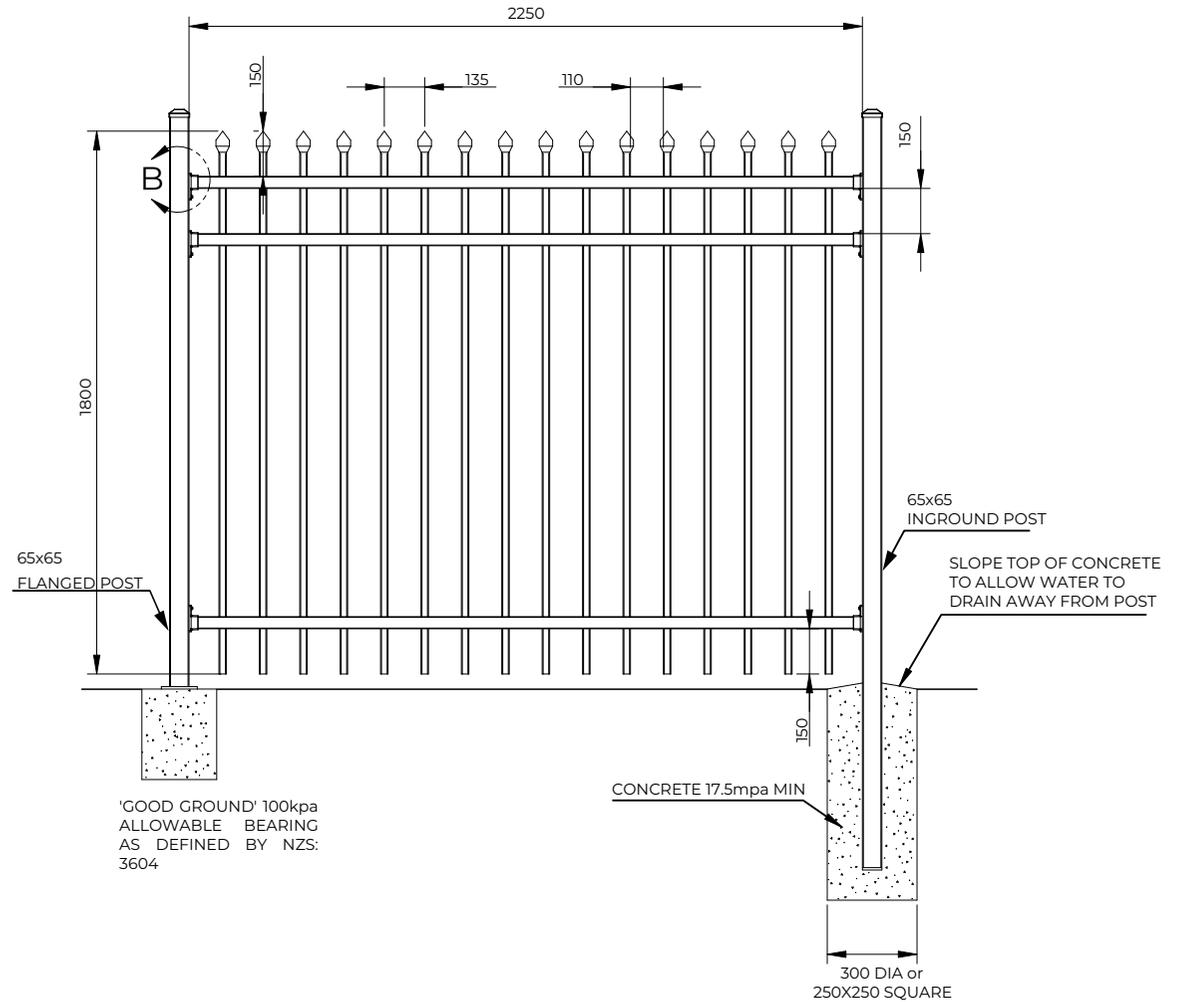

'GOOD GROUND' 100kpa ALLOWABLE BEARING AS DEFINED BY NZS: 3604

CONCRETE 17.5mpa MIN

300 DIA or 250X250 SQUARE

Fentec

Terranota Ltd. P.O. Box 1703 Invercargill 1703
 Telephone: 0800 002 725
 Email: sales@fentec.co.nz
 Website: www.fentec.co.nz

Model

Fortress Panel 1800mm
 SPEAR TOP
 FAFFP1822-S

Size A4	Date issued 2023-03-31	Rev	DO NOT SCALE DRAWING
-------------------	----------------------------------	-----	-------------------------

Sheet 1 of 1	Weight
------------------------	--------

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

Rail profile	40x40 square aluminium with R3 radius on corners	Bracket fixing	External aluminium bracket
Picket profile	25x25 aluminium with R3 radius on corners	Post caps	External aluminium caps (standard) or Internal plastic caps (optional)
Panel length	2250x1800mm	Flanged post	65x65x1900mm (125mm square flange) M12 fixings
		Inground post	65x65x2500mm